

STAMFORD®

S6L1D-H4 Wdg.312 - Technical Data Sheet

Standards

STAMFORD industrial alternators meet the requirements of the relevant parts of the IEC 60034 and the relevant sections of other international standards such as BS5000-3, ISO 8528-3, VDE 0530, NEMA MG1-32, CSA C22.2-100 and AS 60034. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



Excitation and Voltage Regulators

Excitation System					
AVR Type	MX341	MX321/MX322	DECS100	DECS150	
Voltage Regulation	± 1%	± 0.5%	± 0.25%	± 0.25%	with 4% Engine Governing
AVR Power	PMG	PMG	PMG	PMG	

No Load Excitation Voltage (V)	14.2 - 15.6
No Load Excitation Current (A)	0.71 - 0.76
Full Load Excitation Voltage (V)	66
Full Load Excitation Current (A)	2.9
Exciter Time Constant (seconds)	0.16

STAMFORD

S6L1D-H4 Wdg.312

Electrical Data								
Insulation System	H							
Stator Winding	Double Layer Concentric							
Winding Pitch	2/3							
Winding Leads	6							
Winding Number	312							
Number of Poles	4							
IP Rating	IP23							
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. Refer to factory for others							
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%							
Short Circuit Ratio	1/Xd							
Steady State X/R Ratio	25.38							
	50 Hz				60 Hz			
Telephone Interference	THF<2%				TIF<50			
Cooling Air Flow	1.89 m³/sec				2.27 m³/sec			
Voltage Star (V)	380	400	415	440	416	440	460	480
Voltage Parallel Star (V)	-	-	-	-	-	-	-	-
Voltage Delta (V)	-	-	-	-	-	-	-	-
kVA Base Rating (Class H) for Reactance Values (kVA)	1335	1400	1400	1340	1481	1569	1638	1694
Saturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	2.14	2.03	1.89	1.61	2.38	2.26	2.16	2.05
X'd Dir. Axis Transient	0.13	0.13	0.12	0.10	0.15	0.14	0.13	0.13
X''d Dir. Axis Subtransient	0.11	0.11	0.10	0.08	0.13	0.12	0.11	0.11
Xq Quad. Axis Reactance	1.86	1.76	1.63	1.39	2.06	1.95	1.86	1.77
X''q Quad. Axis Subtransient	0.28	0.26	0.24	0.21	0.31	0.29	0.28	0.26
XL Stator Leakage Reactance	0.06	0.06	0.05	0.05	0.07	0.06	0.06	0.06
X2 Negative Sequence Reactance	0.17	0.16	0.15	0.13	0.19	0.18	0.17	0.16
X0 Zero Sequence Reactance	0.06	0.06	0.05	0.05	0.07	0.06	0.06	0.06
Unsaturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	2.57	2.44	2.26	1.93	2.86	2.71	2.59	2.46
X'd Dir. Axis Transient	0.15	0.15	0.14	0.12	0.17	0.16	0.16	0.15
X''d Dir. Axis Subtransient	0.13	0.13	0.12	0.10	0.15	0.14	0.13	0.13
Xq Quad. Axis Reactance	1.91	1.81	1.68	1.43	2.12	2.01	1.92	1.82
X''q Quad. Axis Subtransient	0.33	0.31	0.29	0.25	0.37	0.35	0.33	0.32
XL Stator Leakage Reactance	0.07	0.07	0.06	0.05	0.08	0.07	0.07	0.07
Xlr Rotor Leakage Reactance	0.08	0.07	0.07	0.06	0.09	0.08	0.08	0.08
X2 Negative Sequence Reactance	0.21	0.19	0.18	0.15	0.23	0.22	0.21	0.20
X0 Zero Sequence Reactance	0.07	0.07	0.06	0.05	0.08	0.08	0.07	0.07

STAMFORD®

S6L1D-H4 Wdg.312

Time Constants (Seconds)		
T'd Transient Time Const.	0.085	
T''d Sub-Transient Time Const.	0.015	
T'do O.C. Field Time Const.	4.150	
Ta Armature Time Const.	0.019	
T''q Sub-Transient Time Const.	0.0117	
Resistances in Ohms (Ω) at 22°C		
Stator Winding Resistance (Ra), per phase for series connected	0.00134	
Rotor Winding Resistance (Rf)	2.42	
Exciter Stator Winding Resistance	19.56	
Exciter Rotor Winding Resistance per phase	0.095	
PMG Phase Resistance (Rpmg) per phase	1.91	
Positive Sequence Resistance (R1)	0.0017	
Negative Sequence Resistance (R2)	0.0019	
Zero Sequence Resistance (R0)	0.0017	
Saturation Factors	400V	480V
SG1.0	0.427	0.445
SG1.2	1.808	1.566
Mechanical Data		
Shaft and Keys	All alternator rotors are dynamically balanced to better than ISO 21940-11 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearing
SAE Adaptor	SAE0,00	SAE0,00
Moment of Inertia	28.237 kgm ²	28 kgm ²
Weight Wound Stator	1361kg	1361kg
Weight Wound Rotor	1116kg	1073kg
Weight Complete Alternator	2836kg	2962kg
Shipping weight in a Crate	2881kg	3007kg
Packing Crate Size	180x105x153(cm)	180x105x153(cm)
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	-	BALL 6224
Bearing Non-Drive End	BALL 6317	BALL 6317









STAMFORD®

S6L1D-H4 Wdg.312

THREE PHASE EFFICIENCY CURVES

50Hz

60Hz

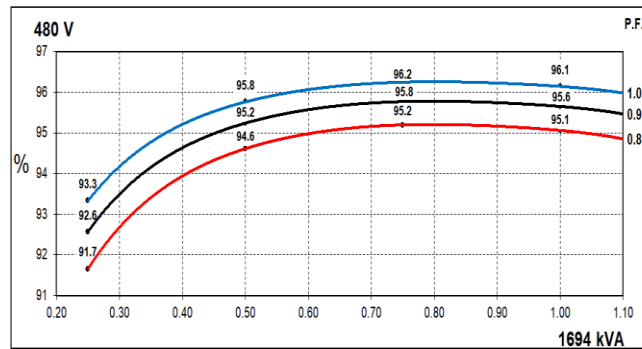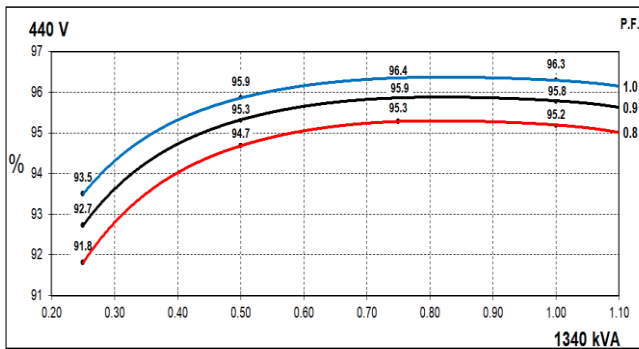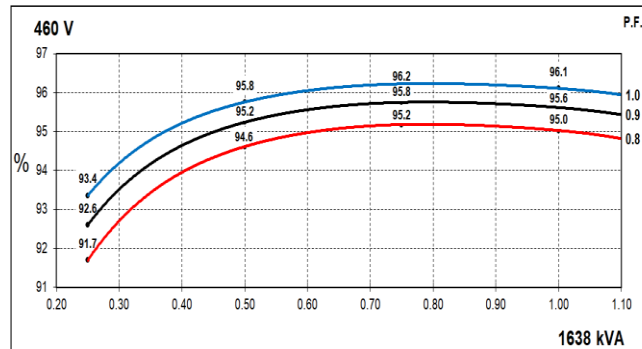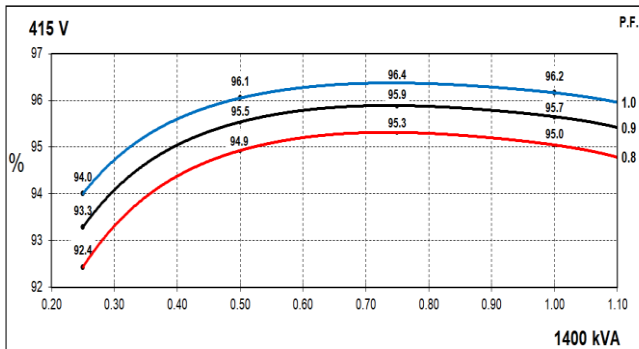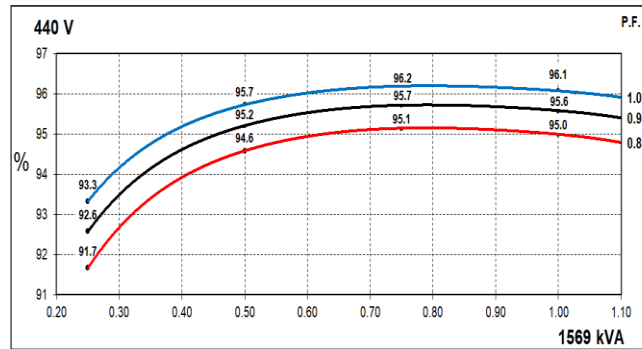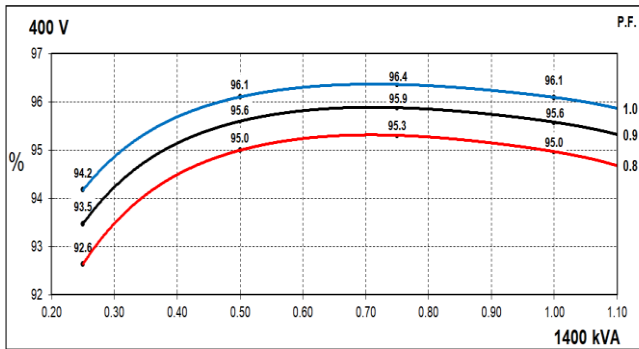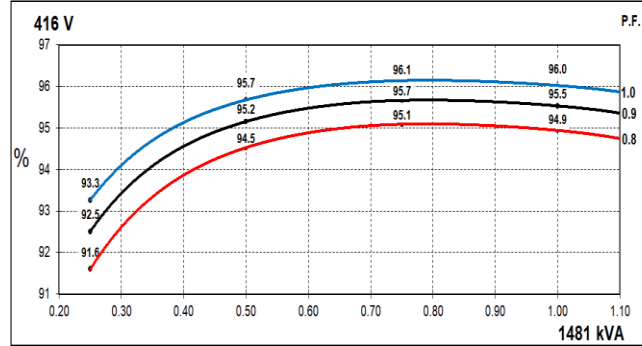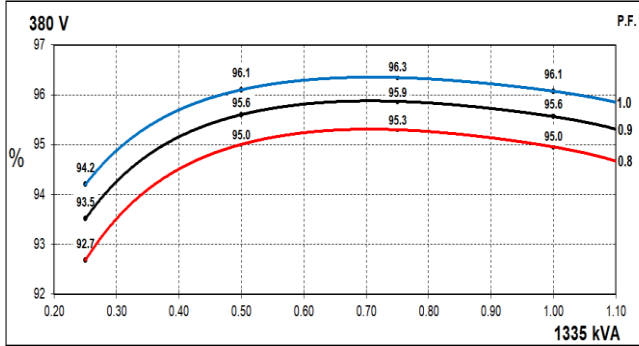


STAMFORD


S6L1D-H4 Wdg.312

Locked Rotor Motor Starting Curves - Separately Excited

50Hz

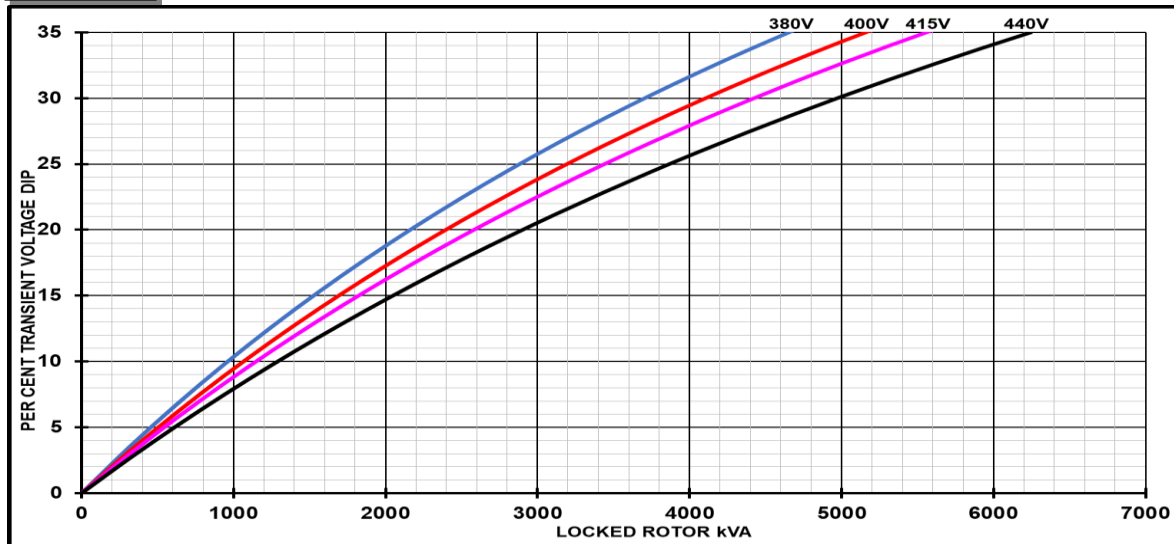

60Hz

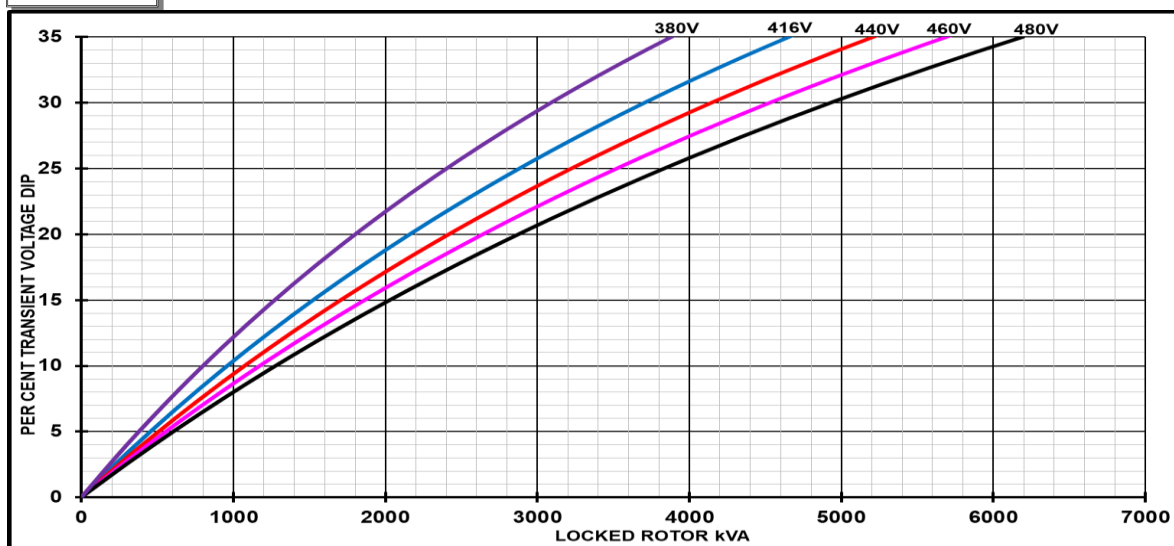

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor	
Lagging PF	Scaling Factor	Lagging PF	Scaling Factor
<= 0.4	1.00	<= 0.4	1.25
0.5	0.95	0.5	1.20
0.6	0.90	0.6	1.15
0.7	0.86	0.7	1.10
0.8	0.83	> 0.7	1.00
0.9	0.75		
0.95	0.70		
1	0.65		


Note: To determine % Transient Voltage Dip or Voltage Rise at various PF, multiply the % Voltage Dip from the curve directly by the Scaling Factor.

STAMFORD®

S6L1D-H4 Wdg.312


Three-phase Short Circuit Decrement Curve - Separately Excited

50Hz

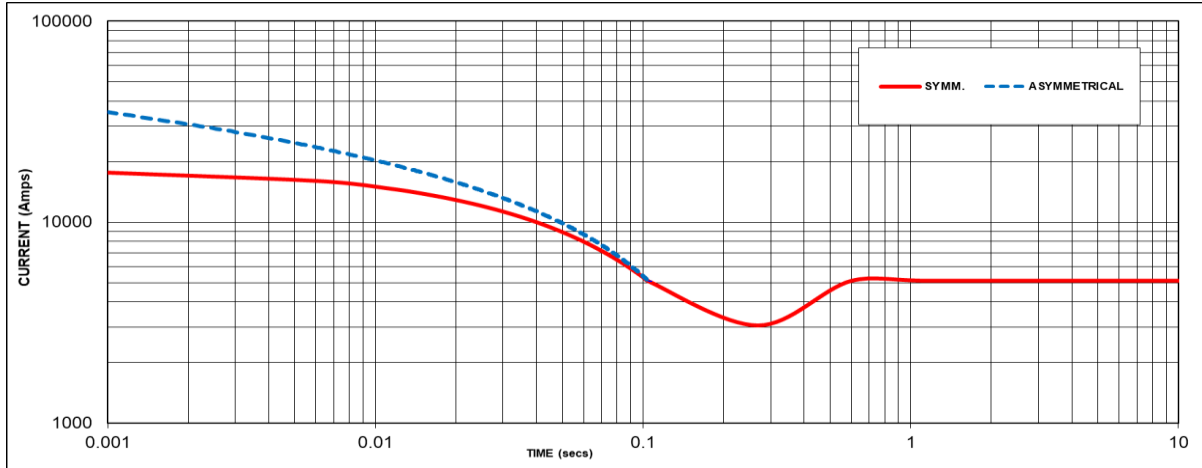

60Hz

Sustained Short Circuit = 5104 Amps

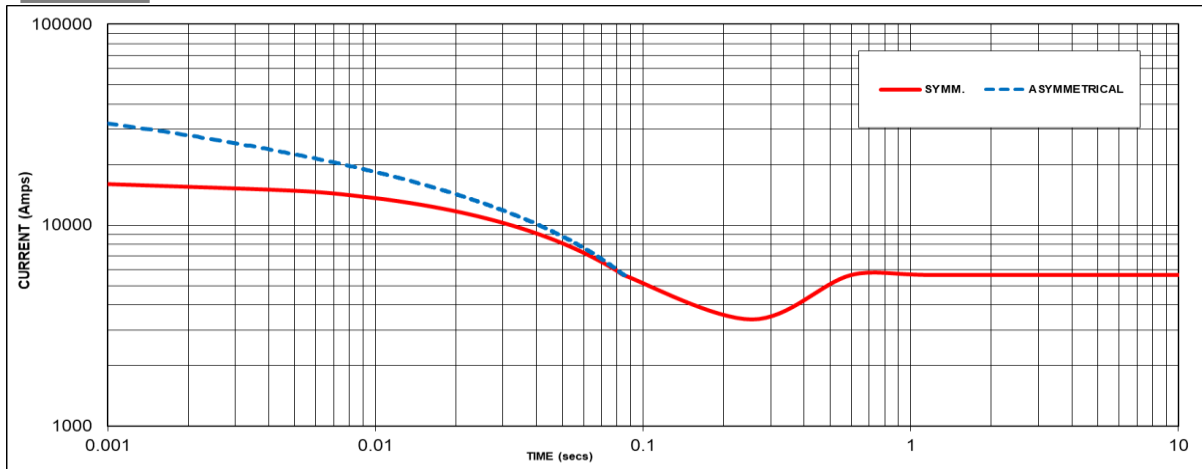

Sustained Short Circuit = 5649 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380V	X 1.00	416V	X 1.00
400V	X 1.05	440V	X 1.06
415V	X 1.09	460V	X 1.10
440V	X 1.16	480V	X 1.15

The sustained current value is constant irrespective of voltage level

If MX322 or digital AVR is used, the sustained short-circuit current value is to be multiplied by a factor of 1.1.

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

Note 3


All other times are unchanged
 Curves are drawn for Star connections under no-load excitation at rated speeds. For other connection (where applicable) the following multipliers should be applied to current values as shown :
 Parallel Star = Curve current value X 2
 Series Delta = Curve current value X 1.732

STAMFORD


S6L1D-H4 Wdg.312

Typical Alternator Operating Charts

400V/50Hz

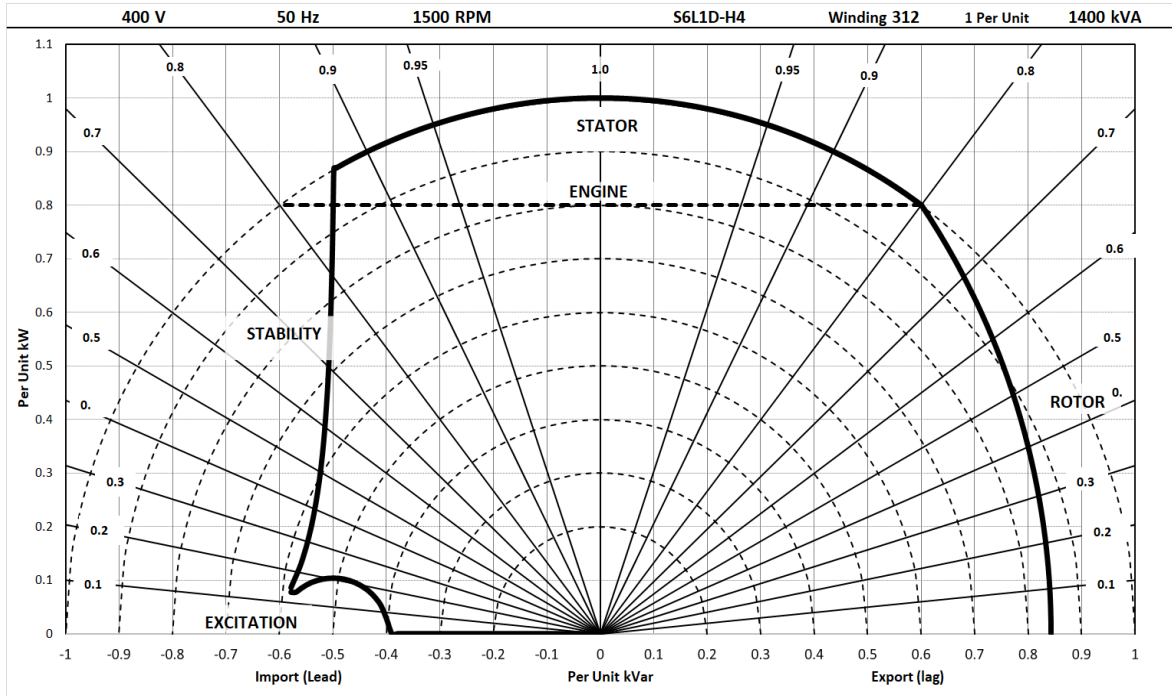

480V/60Hz

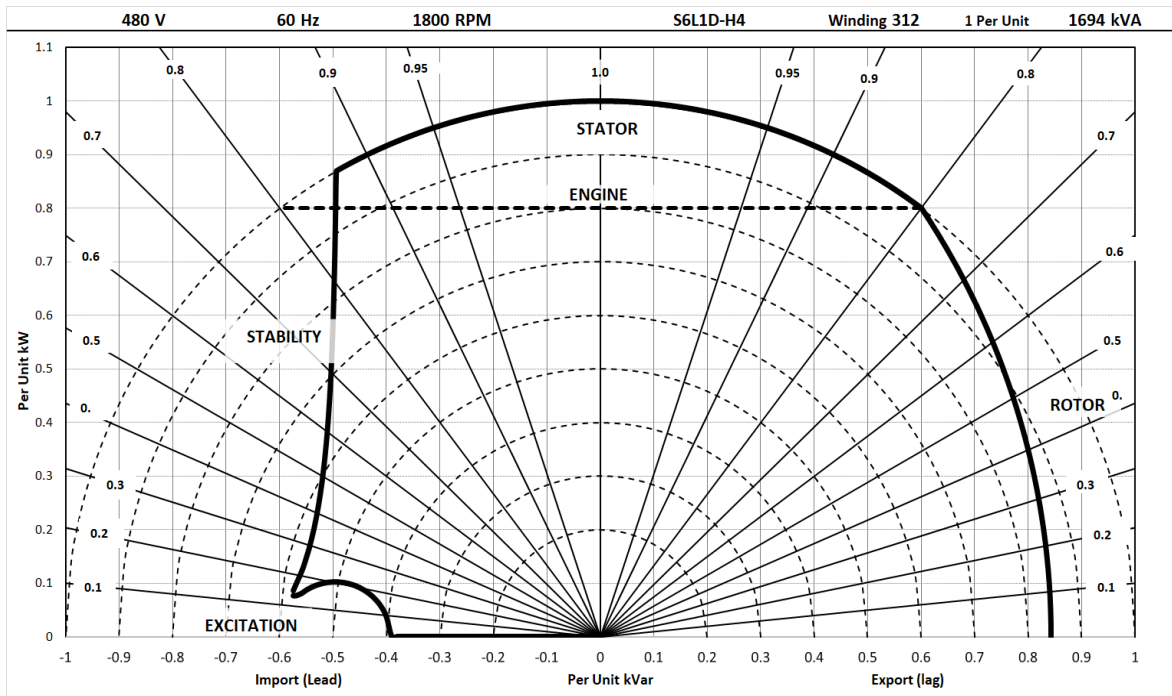

STAMFORD®

S6L1D-H4 Wdg.312

RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C				Standby - 150/40°C				Cont. H - 125/40°C				Cont. F - 105/40°C			
50 Hz	Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Delta (V)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	kVA	1430	1500	1500	1435	1390	1460	1460	1400	1335	1400	1400	1340	1240	1305	1305	1250
	kW	1144	1200	1200	1148	1112	1168	1168	1120	1068	1120	1120	1072	992	1044	1044	1000
	Efficiency (%)	94.8	94.8	94.9	95.1	94.9	94.9	95.0	95.1	95.0	95.0	95.0	95.2	95.1	95.1	95.2	95.3
	kW Input	1207	1266	1265	1207	1172	1231	1230	1177	1125	1179	1178	1126	1043	1098	1097	1050

60 Hz	Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Delta (V)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	kVA	1588	1681	1756	1812	1544	1637	1706	1762	1481	1569	1638	1694	1375	1456	1525	1575
	kW	1270	1345	1405	1450	1235	1310	1365	1410	1185	1255	1310	1355	1100	1165	1220	1260
	Efficiency (%)	94.8	94.9	94.9	94.9	94.9	94.9	95.0	95.0	94.9	95.0	95.0	95.1	95.0	95.1	95.1	95.2
	kW Input	1340	1418	1480	1527	1302	1380	1437	1484	1248	1321	1379	1426	1157	1225	1283	1324

De-rates

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C @ Class H temperature rise (please refer to applications for ambient temperature de-rates at other temperature rise classes)
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters (for <690V) or 1500 meters (for >690V) must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

stamford-avk.com

**For Applications Support:
applications@cummins.com**

**For Customer Service:
emea.service@cummins.com**

**For General Enquiries:
Stamford-avk@cummins.com**

Copyright 2020. Cummins Generator Technologies Ltd. All rights reserved.
Cummins and the Cummins logo are registered trade marks of Cummins Inc.
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.

